


## Features:



- 24/7 Operation
- IPS, that prevents system errors when power loss (Optional)
- ECC, preventing corrupt data on the system
- Very small slim design, with only 26 mm depth
- JAHC for scheduling ON/OFF during a week
- System bracket for VESA (Optional)
- Dual digital signal output

ALPHA SI350 is based on Intel i3 10. th. generation processor. This is a top level industrial designed player, offering great value for signage and industrial tasks.

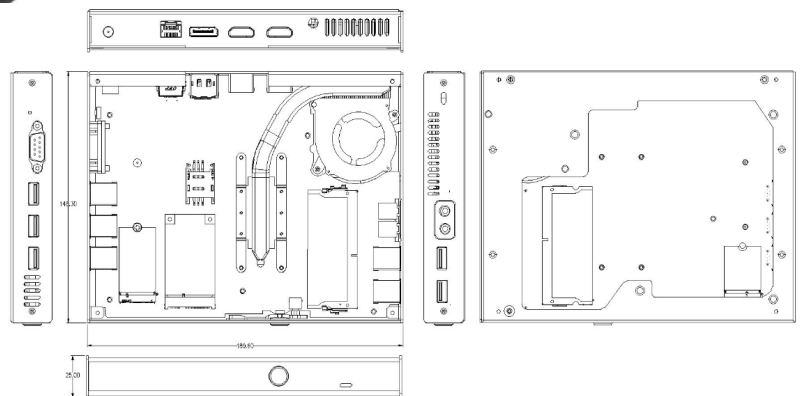

<b>CPU</b>	Intel® Core™ i3-10110U 14 nm, TDP 10-25W, 2 cores, 4 MB Cache
<b>Frequency</b>	2.10 Ghz (up to 4.10 Ghz)
<b>BIOS</b>	AMI Source code
<b>Chipset</b>	SOC
<b>Memory</b>	8 GB DDR4 2666Mhz SO-DIMM
<b>GPU</b>	Intel® 10th Gen. UHD Graphics
<b>Displayport</b>	1 x DP (Max.4069x2304 @60Hz)
<b>HDMI</b>	2 x HDMI (Max.4069x2304 @60Hz / 24hz)
<b>Network</b>	1 x Realtek 8111H Gigabit Ethernet (RJ45)
<b>USB</b>	5x USB 3.2 Gen2 (10Gbps)
<b>Serial Port</b>	1 x RS232
<b>Audio</b>	1 x AUDIO-OUT & SPDIF, 1 x MIC-IN
<b>Storage</b>	1 x Full-size Mini-PCIe 1 x M.2(2230) for WiFi 1 x M.2(2242/2280) for SSD

<b>Mini-PCIe</b>	1 x Full-size Mini-PCIe for WiFi/BT/3G/4G
<b>JAHC</b>	WatchDog Timer Auto Power On RTC
<b>Operating System</b>	Windows 10
<b>Power Req.</b>	DC-IN, 19V/2.1A
<b>Fanless</b>	Yes
<b>Construction</b>	Metal
<b>Operation temp.</b>	0°C ~ 40°C (32°F ~ 104°F)
<b>Mounting (Optional)</b>	ALPHA VESA Bracket ALPHA Wallmount with player bracket
<b>Relative Humidity</b>	95% @ 40°C (non-condensing)
<b>Color</b>	Black
<b>Certification</b>	CE, FCC Class B, CCC
<b>Dimensions</b>	189.6mm x 148.3mm x 26mm