


Features:

- 24/7 Operation
- IPS, that prevents system errors when power loss (Optional)
- ECC, preventing corrupt data on the system
- Very small slim design, with only 26 mm depth
- JAHC for scheduling ON/OFF during a week
- System bracket for VESA (Optional)
- Dual digital signal output

ALPHA SI550 is based on Intel i5 10. th. generation processor. This is a top level industrial designed player, offering great value for signage and industrial tasks.

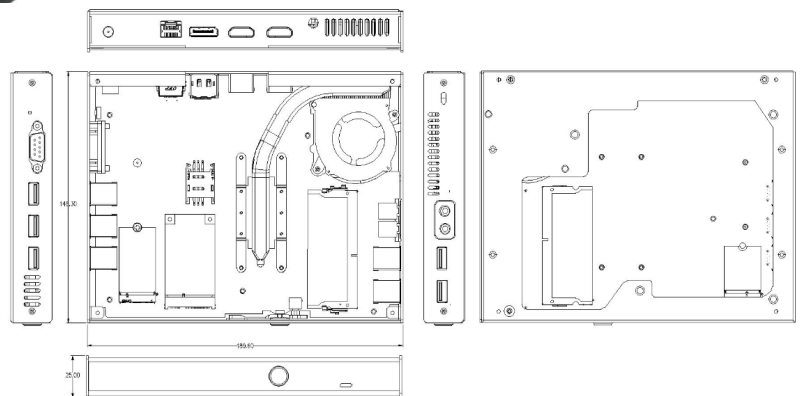

CPU	Intel® Core™ i5-10210U 14 nm, TDP 10-25W, 2 cores, 6 MB Cache
Frequency	1.60 Ghz (up to 4.20 Ghz)
BIOS	AMI Source code
Chipset	SOC
Memory	8 GB DDR4 2666Mhz SO-DIMM
GPU	Intel® 10th Gen. UHD Graphics
Displayport	1 x DP (Max.4069x2304 @60Hz)
HDMI	2 x HDMI (Max.4069x2304 @60Hz / 24hz)
Network	1 x Realtek 8111H Gigabit Ethernet (RJ45)
USB	5x USB 3.2 Gen2 (10Gbps)
Serial Port	1 x RS232
Audio	1 x AUDIO-OUT & SPDIF, 1 x MIC-IN
Storage	1 x Full-size Mini-PCle 1 x M.2(2230) for WiFi 1 x M.2(2242/2280) for SSD

Mini-PCle	1 x Full-size Mini-PCle for WiFi/BT/3G/4G
JAHC	WatchDog Timer Auto Power On RTC
Operating System	Windows 10
Power Req.	DC-IN, 19V/2.1A
Fanless	Yes
Contruction	Metal
Operation temp.	0°C ~ 40°C (32°F ~ 104°F)
Mounting (Optional)	ALPHA VESA Bracket ALPHA Wallmount with player bracket
Relative Humidity	95% @ 40°C (non-condensing)
Color	Black
Certification	CE, FCC Class B, CCC
Dimensions	189.6mm x 148.3mm x 26mm